
Quick Start Guide



4-Port PS/2 KVM Switch model AKSP04

Read this guide thoroughly and follow the installation and operation procedures carefully to prevent any damage to the unit and / or any of the devices it connects to. qsg Q10003

KVM Highlights

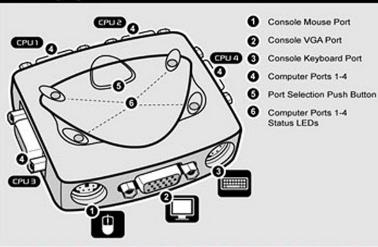

Installation cont.

Repeat steps 2 and 3 for the second, third and fourth computers to CPU2-CPU4 of AKSP04 with the cables provided.

After all devices and cables are properly installed, you are ready to turn on your computers. The KVM switch will emulate the keyboard and mouse on each port allowing error free boot-up of all computers.

You can switch control between the connected computers by pressing the Port Selection Push Button (number 5 from KVM Highlights section) to switch from one computer to the next, or by using the HotKeys as indicated in the next section.

Thank you for choosing Aluratek® to serve your KVM (keyboard, video monitor, and mouse) needs. In no time, you will able to use one keyboard, mouse and monitor to control up to four of your computers. In addition to making sure only quality materials are used for manufacturing, Aluratek® is also dedicated to provide the best customer satisfaction and support.

Note: Your order has been carefully packaged and inspected, and we hope you are pleased with the Aluratek® product you purchased. Please inspect the contents of the package to ensure that you have received all items and that nothing has been damaged. If you discover a problem, please contact us immediately for assistance



Aluratek, Inc. 1 Technology Drive Suite F213 Irvine, CA 92618 USA www.aluratek.com support@aluratek.com

Features & Requirements

Features:

- Use one keyboard, video monitor and mouse to control up to four computers
- Unique 3-in-1 cable with one locking connector for integrated PS/2 keyboard. PS/2 mouse and VGA monitor signals
- · Emulate keyboard and mouse for error free boot-up
- · Port selection through Pushbutton and Hotkeys
- Supports video resolution up to 2048 x 1536
- · Built-in Auto-Scan mode
- · Built-in LED's for port monitoring
- · Plug-n-Play, no software required
- · No external power needed
- Limited 5 year warranty

Requirements:

- . Windows® 95, 98SE, 2000, ME, NT, and XP or Linux, Novell and UNIX
- . Computers with PS/2 keyboard, PS/2 mouse and HDB15 VGA connector
- PS/2 keyboard, PS/2 mouse and VGA/SVGA/MultiSync or LCD monitor

Package Contents

The following should be included in the package:







(1) x 4-Port PS/2 KVM Switch

(4) x 6" KVM Cables

(1) x Quick Start Guide

Registration Card

3


Installation


Please make sure all devices are turned off before proceeding.

STEP 1:


HotKeys

Console Connection - Please connect your PS/2 keyboard to the purple connector, your PS/2 mouse to the green connector and your monitor to the blue connector.

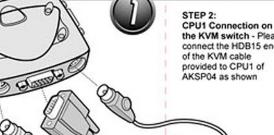





Installation cont.

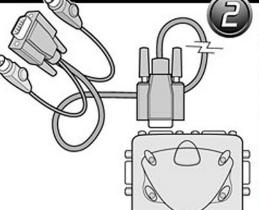

Installation cont.

STEP 3: CPU1 Connection on the computer side - Please connect the three connectors of the same cable used in step 2 to the computer as shown below (purple for PS/2 keyboard. green for PS/2 mouse, and blue for VGA monitor ports)





⊕ ⊕ ⊕

Technical Support

returning this device.

E-mail: support@aluratek.com Web: www.aluratek.com/support Local (Irvine, CA): 949-419-6504 Toll free: 1-866-580-1978

Radio and TV Interference Statement / Warranty

WARNING!!! This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by whatever measures may be required to correct the interference.

IN NO EVENT SHALL ALURATEK'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, ITS ACCOMPANYING SOFTWARE, OR ITS DOCUMENTATION.

Aluratek makes no warranty or representation, expressed, implied, or statutory, with respect to its products, contents or use of this documentation and all accompanying software, and specifically disclaims its quality, performance, merchantability, or fitness for any particular purpose. Aluratek reserves the right to revise or update its product, software or documentation without obligation to notify any individual or entity.



If you need further assistance, please contact Aluratek support department prior to

Selects CPU4 Auto-Scan automatically switches from one active computer to the other at fixed intervals, enable you to monitor their activity. Auto-Scan suspends when mouse or keyboard activity is detected and resumes when the activity stops



left Ctrl left Ctrl 1

left Ctrl left Ctrl (2)

left Ctrl left Ctrl 3

loft Ctrl loft Ctrl 4

left Ctrl left Ctrl F1

Selects CPU1

Selects CPU2

Selects CPU3

Enables you to switch from the current active computer to the previous or the next computer in sequence by pressing T or L key. It can be aborted by pressing any other key



Set Auto-Scan interval in 3, 8, 15, or 30 seconds Note: The interval will reset to 3 seconds when all connected computers are turned off



Set keyboard typematic rate (characters/sec), repeating the same keystroke when a key is held down, from 10, 15, 20 to 30 characters/sec.

Note: The rate will reset to 10 characters/sec when all connected computers are turned of